

Failure loading to HCS's


Design programme: EliSlab version 1.0.6
 Design standard: BS8110
 Dead Load = 1.5kPa added as standard to tables
 Slab own weight included in calculations
 Shear resistance enhancement (i.e. filling of slab cores) not included in these calculations
 Slab width = 1.2m
 Slab bearing width = 100mm [i.e. clear span = L (as per table below) less 100mm]
 SLS Live Load as per tables below
 ULS = 1.4xDL + 1.6xLL
 Failure criteria:



ULS ultimate moment OR shear resistance failure
 SLS failure: deflection more than L/250

This information is based on a uniformly distributed loading. Forward Engineering / Architectural drawings to info@elematicsa.co.za for a budget quotation.


200 HCS Failure Live Load (SLS)

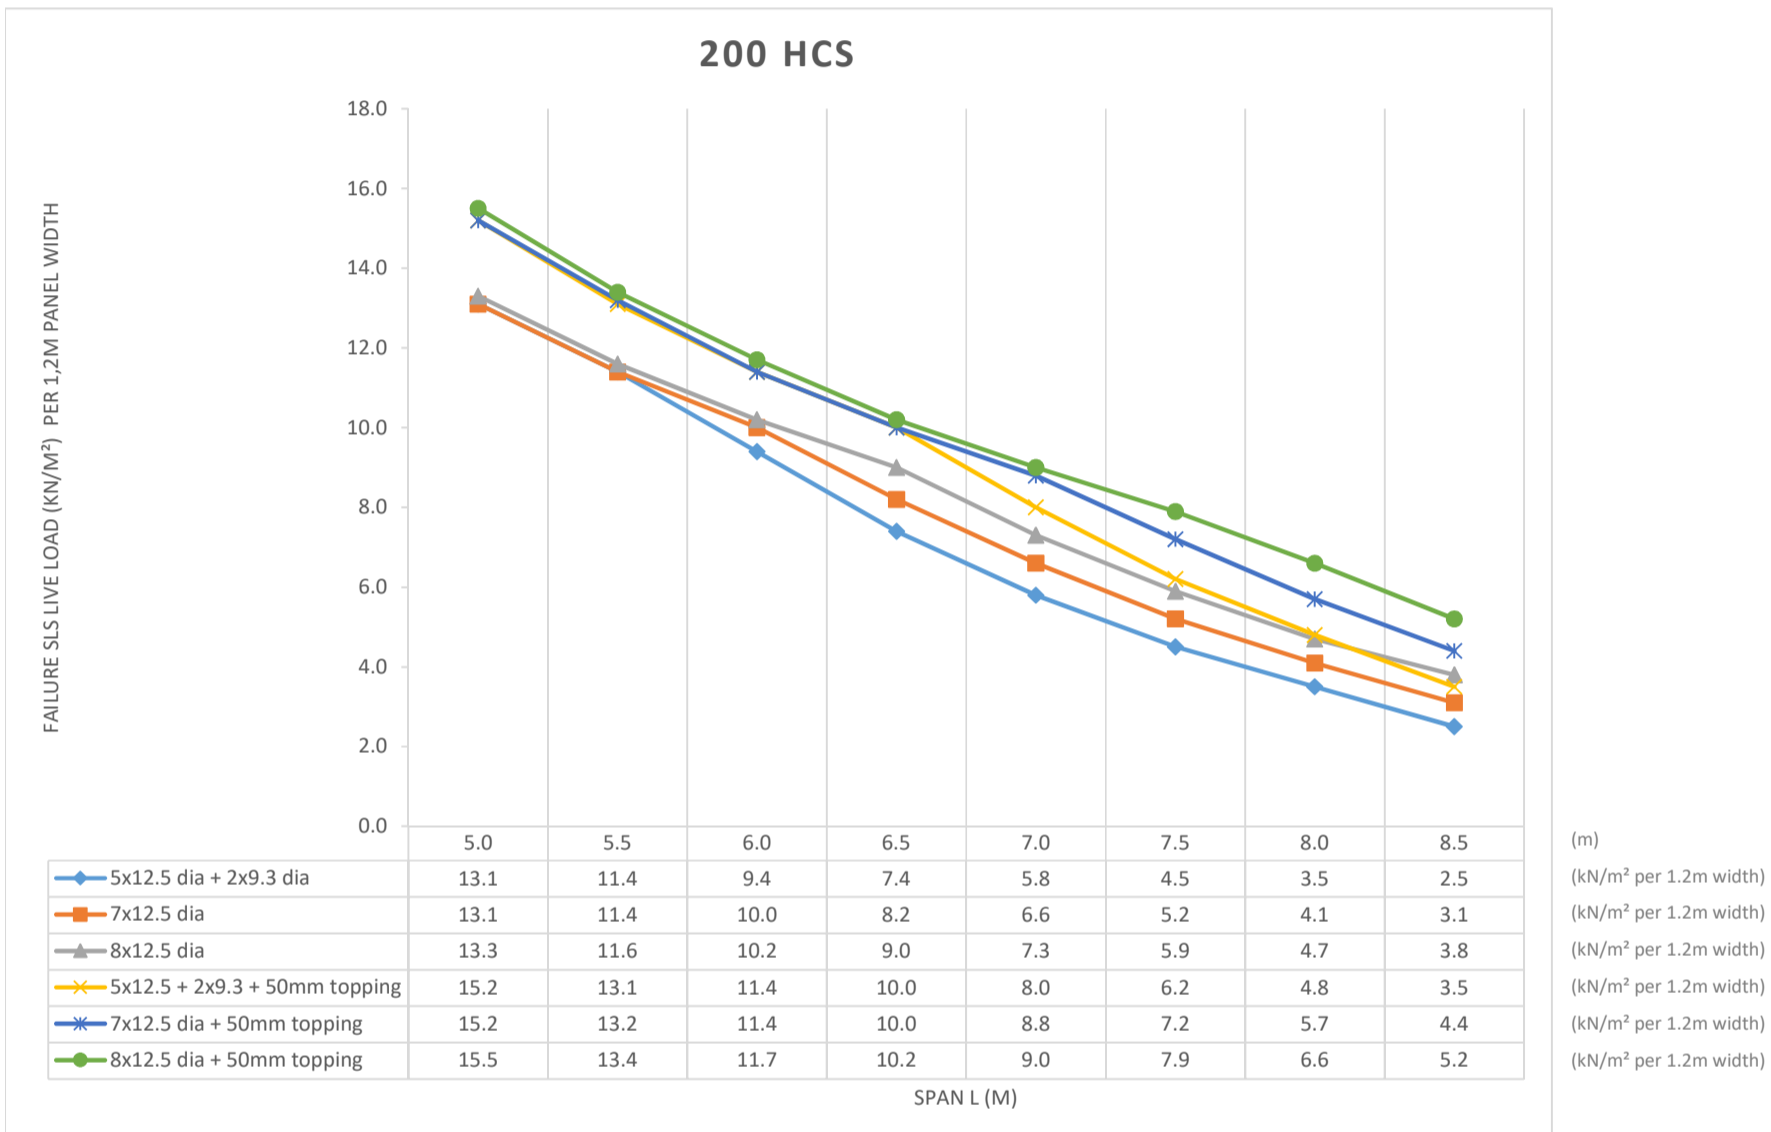

Notes:

- Design tables to be used as indicative only
- Loads as listed are distributed Live Loads ONLY
- Structural topping must be 30 MPa concrete
- Structural toppings are not recommended due to practical installation implications
- Higher loads can be resisted with a thicker structural topping / thicker slab thickness
- Although L/250 is used as a failure criteria above; deflection in excess of 20mm is not recommended and must be verified by ESA
- Slab strand weight quantities:
 - 5x12.5 + 2x9.3 dia: 4.05kg/m²
 - 7x12.5 dia: 4.55kg/m²
 - 8x12.5 dia: 5.2kg/m²
 if top strands are present; add:
 - 0.8kg/m² for 2x9.3 dia top strands
 - 1.2kg/m² for 3x9.3 dia top strands
 - 1.6kg/m² for 4x9.3 dia top strands

8. Strand Patterns:

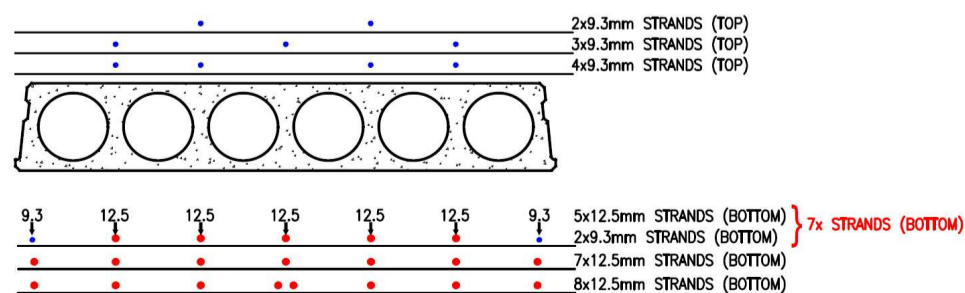

Slab own weight = 2.8kN/m²